


# **OPERATOR'S MANUAL**

# MS-4010BPD 4 Gallon Backpack Manual Sprayer with Diaphragm Pump



**SERIAL NUMBER** 

502MS0000001 - 502MS9999999

# **WARNING**

Cancer and Reproductive Harm www.P65Warnings.ca.gov



Read and understand all provided literature before use. Failure to do so could result in seriouly injury.

# **INDEX**

1.	Introduction3
2.	Safety information 4, 5
	2.1 Personal protective equipment
	2.2 Safety Instructions
3.	General Information7
	3.1 Main components
	3.2 Technical data
	3.3 Chemical compatibility
	3.4 Assembly
	3.4.1 Parts you will receive
	3.4.2 How to assemble your sprayer

4.	Operation	9
5.	Maintenance	9
	5.1 Maintenance guide	
6.	Troubleshooting guide	. 10
7.	Product Registration	11,12
8.	Warranty	13

# 1. INTRODUCTION

Specifications, descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subjet to change without notice. Ilustrations may include optional equipment and accesories, and may not include all standard equipment.



Read and understand all provided literature. Literature contains specifications and information for safety, operation, maintenance, storange, and assembly specific to this product. Scan QR codes for more information.



For aditional literature, including safety manuals where applicable, or questions regarding tems used in this manual, visit:

https://www.echo-usa.com/manuals OR





https://www.shindaiwa-usa.com/manuals




This manual contains important safety warnings, please read it carefully to avoid any possible accident. Keep all warning stickers and if necessary replace them.

# **Servicing Information**

### Parts / Serial Number

Genuine ECHO Parts and
Assemblies for you ECHO products are
available only from an
Authorized ECHO Dealer. When you do
need to buy parts always have
the Model Number
and Serial Number of the unit with you.
For future reference write them
in the space provided below



	0 1 1 1 1	
Model No	Serial No.	



SAFETY INFORMATION MS-4010BPD

# 2. SAFETY INFORMATION

### **Manual Safety Symbols and Important Information**

Throughout this manual and the product itself, you will find safety alerts and helpful, informational messages preceded by symbols or key words.

The following and explanation of those symbols and key words and what they mean to you.

# **WARNING**

The safety alert symbol accompanied by the word "WARNING" calls attention to an act or condition wich CAN lead to serious personal injury or death if not avoided.




CIRCLE AND SLASH SYMBOL

This symbol means the specific action shown is prohibited. Ignoring these prohibitions can result in serious or fatal injury.


Symbol	Description	Symbol	Description
mp)	Wear Hand Protection		No Flamable Liquids
	Wear Safety Mask	Sing	Corrosive
	Wear Safety Glasses		Corrosive
W	Wear Safety Coveralls	30°C / 86°F	Temperature Limit
	Wash your hands before to operate Sprayer		Toxic substances
0	Clean Sprayer		

### 2.1 PROTECTION EQUIPMENT

- -Industrial gloves
- -Safety glasses
- -Closed toe footwear
- -Coverall
- -Safety mask



- Read this manual carefully before operating the equipment.
- Incorrect handling by unqualified persons may cause serious accidents.
- Do not make modifications or adaptations because they can compromise your equipment and put your safety and that of a third party at risk. They also invalidate the warranty.
- Do not allow the presence of children, the elderly, people with disabilities or animals when using the equipment.
- Keep your equipment in good condition and in a safe place. Always wash and store your equipment without pressure.
- Read and follow the instructions of the chemical product you are going to apply.
- Wear the personal protective equipment mentioned above when using, filling or washing your sprayer.
- · Keep connections tight to prevent leaks.
- Never fill your sprayer with hot liquids, maximum: 30 ° C = 86° F.

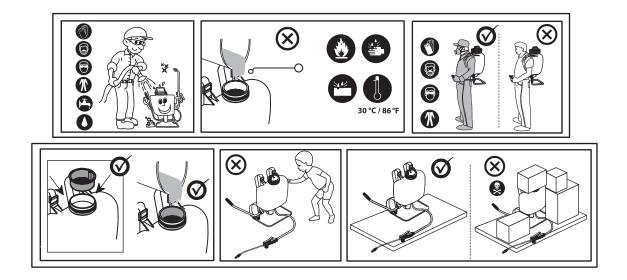

# SAFETY INSTRUCTIONS

# WARNING A DANGER

Carrefully read and understand the Operator's Manual supplied with this unit priror to filling, using and/or cleaning this sprayer. DO NOT use flammable liquids in the sprayer. They can ignite and explode. Always wear splash goggles and all required protective gear and clothing when filling, using, cleaning, or performing maintenance on the sprayer failure to follow all instructions can result in fire, explosion, and serious injury.


- Always inspect your sprayer throughly before and after each use. Check to be sure hose is securely attached and in good condition before pressurizing the tank.
- Do not spray on or near electrical installations.
- Keep the work area clear of people and animals.
- Do not use sprayer when wind conditions cause spray to contact operator, plants, or other surfaces that may be harmed by spray solutions.
- Wear a mask or respirator when filling, using, and cleaning sprayer, if recommended by the spray material manufacturer.
- Oil the pump tube tank seal o-ring prior to first usage so the o-ring will seal properly.
- A backpack sprayer is a tool for spraying chemicals, and because of this, special safety precautions must be
  observed to reduce the risk or personal injury. Do not use it for other purposes since misuse may result in personal
  injury or damage, including the sprayer itself.
- Your judgment and physical abilities may not be good if you are tired or sick, are taking medication, and have taken alcohol or drugs. Operate the sprayer only if you are physically and mentally well.
- Working with any backpack sprayer can be strenuous, if you get tired, take a break. Tiredness may result in loss of concentration and control.
- Adjust shoulder harness for comfortable operation before starting work. To reduce the risk of spillage, keep container
  upright, do not bend at the waist always bend at the knees and support yourself to ensure proper balance.
  Remember that a sprayer filled with liquid has a significant amount of weight. Use caution when bending, leaning,
  or walking.
- Maintain footing and balance at all times. Do not stand on slippery, uneven or unstable surfaces. Do not work in odd positions or on ladders.
- Do not operate your backpack sprayer indoors or in inadequately ventilated areas. Operate the sprayer under good visibility and daylight conditions only. Avoid spraying towards people, pets, open windows, or vehicles.
- Tighten all conections before using the sprayer. Conections may have loosened during shipping and handling.
- Always release pressure in the tank prior to first usage so the o-ring will seal properly.
- Before opening a container of pesticide or other spray material, carefully read, understand, and follow all instructions on the label.
- Never use caustic or corrosive chemicals wich could damage the unit.
- Do not use hot liquids in sprayer. Maximum temperature 30°C, 86°F.
- Do not drop a tank that has been pressurized. If tank is dropped, inspect immediately. Consult chemical manufacturer's instructions for other important safety information.

- Never attempt to pressurize the unit by any other method than with the pump module provided. Never over-pressurize the unit.
- Do not eat, drink, or smoke while spraying.
- Wash face and hands with soap and water after spraying.
- Clean and rinse tank and spray gun/wand assembly after each use to prevent crystallinzing, and clogging
  or chemical damage to the unit.
- Do not store sprayer under pressure, or with spray solution in tank.
- Do not transfer spray material to other containers, especially food and/or drink containers.
- Keep spray material locked up and out of reach of children and animals.
- Use only original manufacturer's replacement parts.

# 3. GENERAL INFORMATION

### 3.1 MAIN COMPONENTS

- 1. Tank
- 2. Tank lid
- 3. Strainer
- 4. Adjustable carrying straps
- 5. Ergonomic grip
- 6. Pump handle
- 7. Shut-off valve with filter
- 8. Adjustable plastic nozzle
- 9. Hose
- 10. Pump system
- 11. Spray wand

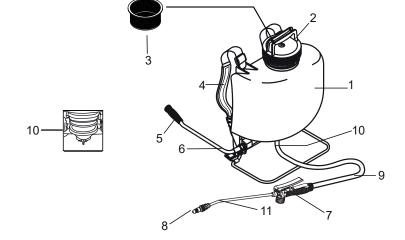

### 3.2 TECHNICAL DATA

	SPECIFICATIONS
Model	MS-4010BPD
Tank capacity	15.0 L /4.0 US gal
Filling port	14.2cm / 5.4"
Carrying Straps	Cushioned with belt
Pumping system	Diaphragm
Hose	Fiber vinyl reinforced 1/4" ID
Shut-Off valve	Professional with filter
Spray wand	20"/52 cm fiber glass
Nozzle	Plastic adjustable
Discharge at 3 bar/min	21 US gal / 800 ml
Work pressure	4 - 6 bar / 58 – 87 psi
Net Weight	4.7 kg / 10.3 Lbs
Weight with box	5.4 kg / 12 Lbs
Dimentions	51.5 x 39 x 22 cms



### 3.3 CHEMICAL COMPATIBILITY

CHEMICAL/SOLVENT	MS-4010BPD
Acetone	No
Asphalt	No
Benzene	No
Bleach Solutions	No
Boric Acid	Yes
Denatured Alcohol	No
Diesel Fuel	No
Enamel Paint	No
Ethyl Alcohol	No
Hydrochloric Acid	Yes
Isopropyl Alcohol	No
Kerosene	No

CHEMICAL/SOLVENT	MS-4010BPD
Lacquer Solvents	No
Latex Paint	No
Methyl ethyl ketone	No
Naptha	No
Ridomill	Yes
Round Up	Yes
Sulfuric Acid	No
Toluene	No
Wettable Powders	Yes
Xylene	No
Note: max 5%	allowed

### 3.4 ASSEMBLY

### Parts you will receive:


- 1 Pump handle
- 1 Spray wand
- 1 Tank lid
- 1 Operator's manual

Inside the tank you will find:

- 1 Strainer

And a plastic bag with:


- 1 Adjustable nozzle
- 1 Lock pin
- 3 Additional Tips

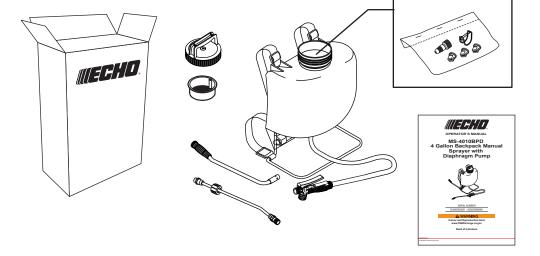


### 3.4.2 How to assemble your sprayer:

### Following is an explanation of how to assemble your sprayer, carefully read the instructions.

- 1. Take out all the parts from the box and from the tank, your sprayer is almost assembled, take the pump handle and install it on the axis in the bottom, affix it with the locking pin; take the strainer and put it on the mouth of the tank, then put on the cap.
- 2. Put the adjustable nozzle on the spray wand and then put the spray wand on the shut-off valve (screw in). Your sprayer is ready for use.





## 4. OPERATION

- Always use the strainer when filling the tank up with liquid.
- Mix the solution in a separate container, following the supplier directions on the box.
- Pour pre-mixed solution into sprayer and cap.
- Place the sprayer on your back and pressurize tank by pumping approximately 25 times.
- You will need to pump once each 3 or 4 seconds to maintain the desired spraying pressure.
- For a continuous spraying, adjust the shut-off valve lever with the lever lock.
- Move the nozzle cap to change the spraying pattern.

### NOTE:

To ensure good performance use original "ECHO" replacement parts

# 5. MAINTENANCE

Since the sprayer needs little maintenance, if you follow the steps mentioned in this manual its lifespan will be very long. Do not keep the sprayer with pressure after finishing your spraying job, release the pressure through the nozzle by depressing the trigger, into a suitable container to re-use later or to dispose of properly.

- Pour approximately 1/2 gallon of fresh water in the tank, pressurize and flush, the pumping system by pressing trigger at least 2 minutes, then drain all remaining water.
- Carrying straps are made of non-absorbent materials, nevertheless in case of solution spillage, wash them with fresh water to eliminate all risk of skin irritation.
- A unit that has been used with herbicides should never be used to spray insecticides, unless the sprayer has been properly cleaned and all other chemicals neutralized. Failure to do this could cause you to kill plants that have been sprayed.
- Always follow manufacturer's instructions of the chemicals in use to avoid accidents and take maximum advantage of the product. Store your sprayer clean, empty and dry in a place protected from sunlight.

MOTE: To keep your sprayer in good condition it is necessary to oil the following parts:

Nozzle O-rings, gun o-rings, piston ring, gasket, breather valve and cap gasket.

### **5.1 MAINTENANCE GUIDE**

### Below are instructions for maintaining your spray:

Rinse with clean water externally and internally, to avoid risk of contamination. When doing maintenance we recommend to replace all orings and gaskets that is composed by:

- Shut-off valve gaskets
- Nozzle gaskets
- Breather check
- Cap gasket.

# 6. TROUBLESHOOTING GUIDE

PROBLEM	CAUSE	SOLUTION
The shut-off valve does not close after releasing the trigger.	The plunger O-rings are worn out or swollen.	Replace them and lubricate the plunger with the new O-rings included in Seal Kit.
The shut-off valve does not function when depressing the trigger.	The filter or nozzle is blocked.	Take the filter out of the shut-off valve, clean or replace it with new filter and clean the nozzle.
The tank collapses "it shrinks".	The cap gasket is not letting air through.	
While working there is leakage between the cap and the tank .	The cap gasket is not lubricated.	Lubricate or replace according to the diagnosis.
While working there is some leakage from the cylinder.	The cylinder can be worn out from the inside or the piston rings damaged	
While working, the sprayer does not generate pressure.	The gaskets are dirty, dry or blocked.	Replace gaskets.
While pressuring the tank with the lever, when you stop it goes up and stays there.	The gasket that is inside the cylinder is blocked or stayed open.	Inspect the module, clean, adjust and put back in place.
While working, the pressure lasts very little time.	The pressure chamber is filled with water because the gaskets are not working.	Take the water out of the sprayer and replace the gaskets.
The sprayer builds low or no pressure.	Check valve in the pump has become stuck and/or there is an air lock in the unit.	Release pressure by keeping flow control open and pumping several times. Disassemble and force seals open by hand if step one does not
The sprayer does not hold pressure or tank leaks at pump connection.	The O-rings and check valve need replacing, the pressure chamber has expanded or the check valves are clogged with debris.	work. Replace O-rings and seals of the module, if there is no improvment change sprayer.
Tank leaks at pump and pressure chamber connection.	The hose clamp is loose or the O-ring is damaged.	Tighten the hose clamp or replace the O-ring.
Module is leaking.	The Sealed module piston-diaphragm pump is damaged.	Replace sprayer, diaphragm pump is not available as serviceable item.
Tank leaks at hose connection.	Clamp is loose or damaged.	Replace hose.

### PRODUCT REGISTRATION

### Thank you for choosing ECHO Sprayer Equipment

Please go to http://www.echo-usa.com/Warranty/Register-Your-ECHO to register your new product on-line. It's FAST and EASY! NOTE: your information will never be sold or misused by ECHO, Incorporated.

Registering your purchase enables us to contact you in the unlikely event of a service update or product recall, and verifies your ownership for warranty consideration.

If you do not have access to the Internet, you can complete the form below and mail to:

ECHO Incorporated, Product Registration, PO Box 1139, Lake Zurich, IL 60047.

# **MELLIMI** PRODUCT REGISTRATION CARD:TARJETA DE REGISTRO:CARTE D'ENREGISTREMENT DU PRODUIT

OPCIÓN ahorre une producto y ductos EC	
NLINE OPTION: Register online and save a stamp! You will be alerted of product updates and/or be sent new ECHO product information and special offers. Simply go to: www.echo-usa.com	

ONLINE OPTION: Register online and save a stamp! You will be alerted of product updates and/or be sent new ECHO product information and special offers. Simply go to: www.echo-usa.com	OFCUN FOR IN EKNET, ir Registrese en la pagina web y alorne una estampilla! Le alertarán sobre actualizaciones del producto y/o se le enviara información sobre los nuevos productos ECHO y las ofertas especiales. Simplemente visite:  www.echo-usa.com	n la pagina web y actualizaciones del pre los nuevos pro- implemente visite:	OPTION EN LIGNE: Enregistrer en ligne et épargner un timble Vous serez informé sur les nouveaux produits ECHO et les mises à jour de produit anisi que les offres spéciales. Simplement visitez le: www.echo-usa.com	épargner un roduits ECHO res spéciales. <b>s.com</b>
ease Print : Por Favor Enscriba Con Letra De Molde : En L	-ettre Carré S.V.P.		Confidential: Information provided will not be shared or sold	it be shared or sold
Purchaser's Name : Nombre del Comprador : Nom de l'acheteur	ne	Primary use of tool: ☐ Professional Uso primario de la herramienta:☐Pro Usage principal: ☐ Professionnel ☐ Do vou wish to receive periodic ECH	☐ Homeowner ofesional ☐ Dueño o ] Residential ☐ Lo	☐ Rental Equip. de casa ☐ Alquiler cation
Address : Dirección : Adresse		by e-mail or receive period by e-mail or Thes No ¿Desea usted recibir informaci tronico sobre el producto ECH Souhaitez-vous recevoir péri	by e-mail? ☐ Yes ☐ No.  Special one special one special one by e-mail? ☐ Yes ☐ No.  Lesse usted recibir información periódica y ofertas especiales por correo electronico sobre el producto ECHO? ☐ Yes ☐ No.  Souhaifez-vous recevoir périodiquement de l'information sur les produits	or correo electes produits
Sity: Ciudad: Ville State: Estado:	Zip Code : Código Postal : Code Postal	ECHO et les offres Did you visit the EC	ECHO et les offres spéciales par courrier électronique ? ☐ Oui Did you visit the ECHO website before purchasing your product? ☐ Yes ☐ No	Oui 🗖 Non
E-Mail Address ː Dirección De Correo Electrónico : Courrier	Électronique	Visitó usted la pagii Sí No Avez-vous visité le Oui Non	Visito usted la pagina web ECHO antes de comprar su producto? ☐ Si ☐ No Avez-vous visité le site d'ECHO avant de procurer votre produit? ☐ Oui ☐ Non	icto?? uit?
Phone Number : Número De Teléfono : Téléphone Dai Dai	Date of Purchase : Fecha de la Compra : Date de l'achat	What factor(s) most Performance Reliability	What factor(s) most influenced your purchase?  Performance Price Dealer  Reliability Prior Experience Quality Friend/Family Rand	
Where Purchased : Nombre del Almacén donde fue Comprado : Lieu d'achat	o : Lieu d'achat	¿Qué factor(es) infl ¿Qué factor(es) infl Euncionamiento Confiabilidad Amigo/Familia	s en su compr C encia Anterior	
Aodel Number : Numero del Modelo : No. de modéle   Serial N	Number : Numero de Serie : No. de série	Quel facteur (facteu ☐ Performance ☐ Fiabilité	influencé le plu:	
egistering your purchase enables us to contact you in the unlikely event of a service update or product recall and verifies y whership in the event of loss.: El registrar su compra nos permitie estar en contacto con usted en caso de cualquier eventromo el aviso de tiempo de servicio o la revocación del producto y verificación de propiedad en caso de robo o pérdida. : en registrament de votre achat nous permettra de vous confacter dant le casa improbable de modifications des instructions carretions de la capacitation de la recordina de vertación de la capacitation de la recordina de vertación de la capacitation de la modificación de la capacitation de	a service update or product recall and verifies your contacto con usted en caso de cualquier evento ón de propiedad en caso de robo o pérdida.: a improbable de modifications des instructions	☐ Ami/Famille ☐ Marque ECHO INC., 400 Oakwood Rd., Lake Zurich 1,800,432.ECHO WWW.ECHO-USA.COM	Garantie	X7572270206 02-20

# ECHO INCORPORATED LIMITED WARRANTY STATEMENT FOR ECHO AND SHINDAIWA PRODUCTS SOLD IN USA AND CANADA BEGINNING 01/01/2010

### ECHO INCORPORATED'S RESPONSIBILITY

ECHO Incorporated's Limited Warranty, provides to the <u>original</u> purchaser that this ECHO or Shindaiwa product is free from <u>defects in material and workmanship</u>. Under normal use and maintenance from date of purchase, ECHO Incorporated agrees to repair or replace at ECHO Incorporated's discretion, any defective product free of charge at any authorized ECHO or Shindaiwa servicing dealer (as applicable) within listed below application time periods, limitations and exclusions. **THIS LIMITED WARRANTY IS ONLY APPLICABLE TO ECHO AND SHINDAIWA PRODUCTS SOLD BY AUTHORIZED DEALERS. IT IS EXTENDED TO THE ORIGINAL PURCHASER ONLY, AND IS NOT TRANSFERABLE TO SUBSEQUENT OWNERS EXCEPT FOR EMISSION RELATED PARTS. Repair parts and accessories replaced under this warranty are warranted only for the balance of the original unit or accessory warranty period. Any damage caused by improper installation or improper maintenance is not covered by this warranty. All parts or products replaced under warranty become the property of ECHO Incorporated. This warranty is separate from and does not exclude or change the Emission Control Warranty Statement that is supplied separately with your new product. Please consult the Emission Control Warranty Statement for details regarding emission related parts. For a list of Authorized ECHO Dealers refer to <a href="https://www.echo-usa.com">www.echo-usa.com</a> or call <b>1-800-432-ECHO**. For a list of Authorized Shindaiwa Dealers refer to <a href="https://www.shindaiwa-usa.com">www.shindaiwa-usa.com</a> or call **1-877-986-7783**.

### **OWNER'S RESPONSIBILITY**

To ensure trouble free warranty coverage it is important that you register your ECHO or Shindaiwa equipment on-line at <a href="www.echo-usa.com">www.echo-usa.com</a> or <a href="www.echo-usa.com">www.echo-usa.com</a> or <a href="www.echo-usa.com">www.echo-usa.com</a> or <a href="www.echo-usa.com">www.echo-usa.com</a> or by filling out the warranty registration card supplied with your unit. Registering your product confirms your warranty coverage and provides a direct link if we find it necessary to contact you.

The owner shall demonstrate <u>reasonable care and use</u>, and follow preventative maintenance, storage, fuel and oil usage as prescribed in the operator's manual. Should a product difficulty occur, you must, at your expense, deliver or ship your ECHO or Shindaiwa unit to an authorized servicing dealer for warranty repairs (within the applicable warranty period), and arrange for pick-up or return of your unit after the repairs have been made. For your nearest authorized ECHO servicing dealer, visit <u>www.echo-usa.com or</u> call 1-800-432-ECHO (3246). For your nearest authorized Shindaiwa servicing dealer, visit <u>www.shindaiwa-usa.com or</u> call 1-877-986-7783. Should you require assistance or have questions concerning this Warranty Statement, you can contact our Consumer Product Support Department at 1-800-432-ECHO (3246). Contact us through the web at <u>www.echo-usa.com</u>, <u>www.shindaiwa-usa.com</u>, or Email us at support@echo-usa.com.

### PRODUCT WARRANTY PERIOD

### **HOMEOWNER APPLICATION**

• 5 YEAR WARRANTY - All units for homeowner, or non-income producing use will be covered by this limited warranty for five (5) years from date of purchase.

### EXCEPTIONS:

- All Cut-off saws and Cut-off Saw Carts for homeowner use will be covered by this limited warranty for one (1) year from the date of purchase.
- For two-stroke engine powered products, the electronic ignition module, flexible drive cables, trimmer solid drive shafts, and TC tines are warranted for the life\* of the product on parts only.
- Cutting attachments such as, but not limited to, bars, chains, sprockets, blades, tines, belts, PowerBroom<sup>tm</sup> and nylon trimmer heads
  for homeowner or non-income producing use will be covered for failures due to defects in material or workmanship for a period of 60
  days from original product purchase date. Any misuse from contact with concrete, rocks, or other structures is not covered by this
  warranty.
- Rapid Loader String Head carries a lifetime warranty on the line locking system, parts only; no labor. Refer to your operator's manual for string head installation and maintenance instructions.
- All SB-Series, Multipurpose Tool attachments, and PRO ATTACHMENT SERIES Split Shaft attachments carry the same warranty duration as the units they are designed to fit.
- All hand tools are covered by a limited lifetime warranty. Warranty is handled through ECHO's Consumer Support Department. For
  specific information, visit www.echo-usa.com. The wooden handle is a natural product that cannot be warrantied. A handle that breaks
  due to misuse, mis-strike, abuse, or neglect is not covered by warranty. If you feel the handle broke prematurely due to a defect,
  please contact ECHO consumer support.
- All handheld sprayers of 50 ounces or less are covered by a 90-day warranty for homeowner applications.
- All generators, spreaders, power washers, and battery powered products are covered by separate limited warranties. Visit www. echo-usa.com for specific information.

### **COMMERCIAL APPLICATION**

- 1 YEAR WARRANTY All Chain Saws and Cut-Off Saws and Cut-off Saw Carts for commercial, institutional, agricultural, industrial, or income
  producing use will be covered by this limited warranty for one (1) year from the date of purchase.
- 2 YEAR WARRANTY All other units for commercial, institutional, agricultural, industrial, or income producing use will be covered by this limited warranty for two (2) years from the date of purchase.

### **EXCEPTIONS:**

- For two-stroke engine powered products, the electronic ignition module, flexible drive cables, trimmer solid drive shafts and TC tines, are warranted for the life\* of the product on parts only.
- Cutting attachments such as, but not limited to, bars, chains, sprockets, blades, tines, belts, PowerBroom<sup>tm</sup> and nylon trimmer heads
  for commercial, institutional, agricultural, industrial, rental, or income producing will be covered for failures due to defects in material
  or workmanship for a period of 30 days from original product purchase date. Any misuse from contact with concrete, rocks, or other
  structures is not covered by this warranty.

- Rapid Loader String Head carries a lifetime warranty on the line locking system, parts only; no labor. Refer to your operator's manual for string head installation and maintenance instructions.
- All SB-Series, Multipurpose Tool attachments, and PRO ATTACHMENT SERIES Split Shaft attachments carry the same warranty duration as the units they are designed to fit.
- All hand tools are covered by a limited lifetime warranty. Warranty is handled through ECHO's Consumer Support Department. For specific information, visit www.echo-usa.com. The wooden handle is a natural product that cannot be warrantied. A handle that breaks due to misuse, mis-strike, abuse, or neglect is not covered by warranty. If you feel the handle broke prematurely due to a defect, please contact ECHO consumer support.
- All handheld sprayers of 50 ounces or less are not covered by warranty for commercial applications.
- All generators, spreaders, power washers, and battery powered products are covered by separate limited warranties. Visit www.echo-usa.com for specific information.

### RENTAL APPLICATION

• 90 DAYS WARRANTY - Units for rental use will be covered against defects in material and workmanship for a period of 90 days from the date of purchase.

### **EXCEPTIONS:**

- All hand tools are covered by a limited lifetime warranty. Warranty is handled through ECHO's Consumer Support Department. For specific information, visit www.echo-usa.com. The wooden handle is a natural product that cannot be warrantied. A handle that breaks due to misuse, mis-strike, abuse, or neglect is not covered by warranty. If you feel the handle broke prematurely due to a defect, please contact ECHO consumer support.
- All handheld sprayers, of 50 ounces or less are not covered by warranty for rental applications.
- All generators, spreaders, power washers, and battery powered products are covered by separate limited warranties. Visit www.echo-usa.com for specific information.
- \* ECHO Incorporated's liability under the "Lifetime" coverage is limited to furnishing parts specified under the PRODUCT WARRANTY PERIOD section of this warranty statement for "Life" free of charge for a period of ten (10) years after the date of the complete unit's final production.

ECHO Incorporated does not offer an over the counter exchange program. Any product re-built or sold through an unauthorized dealer, or an unauthorized outlet store, is sold without ECHO Incorporated's limited warranty coverage. This Limited Warranty coverage is extended to the <u>original purchaser only, and is not transferable except for emission related parts</u>. Repair parts and accessories replaced under this warranty are warranted only for the balance of the original unit or accessory warranty period. Any damage caused by improper installation or improper maintenance is not covered by this warranty. All parts or products replaced under warranty become the property of ECHO Incorporated.

### PURCHASED REPAIR PARTS, SHORT BLOCKS AND ACCESSORIES

- 90-day homeowne, or non-income producing warranty
- 30-day commercial, institutional, agricultural, industrial, income producing, or rental application warrant

### ATTENTION TWO-STROKE ENGINE POWER PRODUCT OWNERS

Two-stroke engine power products are quality-engineered and manufactured to exact tolerances to provide superior performance. To help ensure the performance of the unit, it is <u>required</u> to use two-stroke oil which meets the ISO-L-EGD Standard per ISO/CD 13738 and JASO M345FD Standards. ECHO and Shindaiwa branded oils are premium two-stroke oils specifically formulated to meet ISO-L-EGD (ISO/CD 13738) and JASO M345FD Standards. The use of two-stroke oils designed for other applications, such as for outboard motors or lawnmowers can result in severe engine damage, and will void your two-stroke engine limited warranty.

### THIS WARRANTY DOES NOT COVER DAMAGE CAUSED BY:

- Lack of lubrication or engine failure, due to the use of two-stroke oils that do not meet the ISO-L-EGD (ISO/CD 13738) and JASO M345FD Standards. Engine problems due to inadequate lubrication caused by failure to use an ISO-L-EGD compliant and JASO M345FD registered oil, will void the two-stroke engine limited warranty. ECHO and Shindaiwa branded oils meet the ISO-L-EGD and JASO M345FD Standard. Emission related parts are covered for 5 years homeowner use or 2 years commercial use regardless of two-stroke oil used, per the statement listed in the EPA or California Emission Defect Warranty Explanation.
- Damage caused by use of gasohol, containing methanol (wood alcohol), or gasoline containing less than 89 octane. Only use gasoline which contains 89 octane or higher. Gasohol which contains a maximum 10% ethanol (grain alcohol) or 15% MTBE (methyl/tertiary/butyl/ether) is also approved. The prescribed mixing ratio of gasoline to oil is listed on the oil label and covered in your operator's manual.
- Engine damage caused by use of ether or any starting fluids.
- Damage caused by tampering with engine speed governor or emission components, or running engines above specified and recommended
  engine speeds as listed in your operator's manual.
- · Operation of the unit with improperly maintained/removed cutting shield or removed/damaged air filter.
- · Damage caused by dirt, pressure or steam cleaning the unit, salt water, corrosion, rust, varnish, abrasives, and moisture.
- Defects, malfunctions or failures resulting from abuse, misuse, neglect, modifications, alterations, normal wear, improper servicing, or use of unauthorized attachments.
- Incorrect storage procedures, stale fuel, including failure to provide or perform required maintenance services as prescribed in the operator's manual. Preventative maintenance as outlined in the operator's manual is the <u>customer's responsibility</u>.
- Failures due to improper set-up, pre-delivery service or repair service by anyone other than authorized servicing dealer during the warranty period.
- · Certain parts and other items are not warranted, including but not limited to: lubricants, starter cords, and engine tune-ups.
- Use of spark plugs other than those meeting performance and durability requirements of the OEM spark plug listed in the Operator's Manuals.

WARRANTY MS-4010BPD

 Overheating or carbon scoring failures due to restricted, clogged exhaust port or combustion chamber, including damage to spark arrester screen.

- · Adjustments after the first (30) thirty days and beyond, such as carburetor adjustment and throttle cable adjustment.
- Damage to gears or gear cases caused by contaminated grease or oil, use of incorrect type or viscosity of lubricants, and/or failure to comply with recommended grease or oil change intervals.
- Damage caused by loading SHRED 'N' VAC® beyond recommended capacity.
- Damage caused by pump or sprayer running dry, pumping or spraying caustic or flammable materials, or lack of or broken strainers.
- Additional damage to parts or components due to continued use after operational problem or failure occurs. Should operational problem
  or failure occur, the product should not be used, but delivered as is to an authorized servicing dealer.

It is a dealer's and/or customer's responsibility to complete and return the warranty registration card supplied with your product or by visiting <a href="https://www.echo-usa.com">www.shindaiwa-usa.com</a>. Your receipt of purchase including date, model and serial number must be maintained and presented to an authorized servicing dealer for warranty service. <a href="https://www.echo-usa.com">Proof of purchase rests solely with the customer</a>. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you. Some states do not allow the exclusion or limitation of incidental or consequential damages, so you may also have other specific legal rights which vary from state to state. This limited warranty is given by ECHO Incorporated, 400 Oakwood Rd., Lake Zurich, IL 60047.

### **DISCLAIMER OF IMPLIED WARRANTIES**

This limited warranty is in lieu of all other expressed or implied warranties, including any warranty of FITNESS FOR A PARTICULAR PURPOSE OR USE and any implied warranty of **MERCHANTABILITY** otherwise applicable to this product. ECHO Incorporated and its affiliated companies shall not be liable for any special incidental or consequential damage, including lost profits. There are no warranties extended other than as provided herein, except for the emission control warranty statement that is provided separately with the product when originally purchased. This limited warranty may be modified only by ECHO Incorporated.

502MS0000001 - 502MS9999999

